Fall Protection Only

neofeu)



**NEX.35** 



TESTED FOR USE **UP TO 140 KG** 

REF. **NEX.35** 

# **EXTENSION LANYARD** FOR ASC'O® GUIDED TYPE FALL ARRESTER



REGULATION<sup>(1)(2)</sup> SHEETS (2) CERTIFICATION EN 353-2 : 2002<sup>(2)</sup> 2016 / 425 RfU 11.062

EN 12841-A : 2006<sup>(1)</sup>

(1) Only with ASC'O® guided type fall arrester. (2) Only with ASC'O® guided type fall arrester and its anchorage line.

FT.NEX.35.GB.01 Rev12012023

# neofeu)



### **TECHNICAL SPECIFICATIONS**


- 1 • To use with ASC'O<sup>®</sup> guided type fall arrester Maxi user weight 140 kg
  - Polyamide tubular webbing wide 20 mm
- 2 Total length with 2 connectors : 35 cm
- 3 • Fitted with with aluminum twist lock connector (NM17ALU), opening 18mm
  - Weight : 20g (without connector)

# DESCRIPTION


NEX.35 extension lanyard is an accessory to use only with the ASC'O® guided type fall arrester. It allows the user to work at a distance from the rope and so improves his mobility and comfort. Fitted with an automatic aluminum connector. Total length of extension lanyard with 2 connectors must not not exceed 350mm Used alone, it is not a PPE.

### USE

Works on height with vertical fall hazards. All types of rope works. Adapted for the industry, the construction and telecom industry.

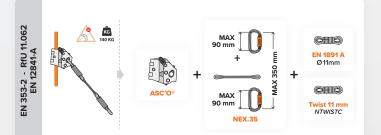

## **MINIMUM CLEARANCE**



#### Fall factor 1

MODEL	MINIMUM CLEARANCE		
	Maxi user weight	F1	Horizontal use
ASC'O® + NEX.35	140 kg	≥ <b>2,60</b> m	x

