

# ABS'O® 40

RÉF.  
**ABS'O40**

## SHOCK ABSORBER FOR ASC'O® GUIDED TYPE FALL ARRESTER



TESTED TO HORIZONTAL  
USE (EDGE)

MAX  
**140 KG**

TESTED FOR USE  
UP TO 140 KG



## TECHNICAL SPECIFICATIONS

- 1 • To use with **ASC'O®** guided type fall arrester
  - Maxi user weight 140 kg
  - Tested for horizontal use with **ASC'O®** and its flexible anchorage
- 2 line **NTWISTC**
  - Energy absorber with a polyamide and polyester tearing strap of 31 mm breadth wrapped with a protective pouch
- 3 • Total length with 2 connectors : 35 cm
  - Fitted with with aluminum twist lock connector (NM17ALU), opening 18mm
  - Weight : 150g (without connector)

## DESCRIPTION


**ABS'O®40** shock absorber is an accessory to use only with the **ASC'O®** guided type fall arrester. It allows the user to work at a distance from the rope and so improves his mobility and comfort. Made of tear webbing protected by an opening pouch which makes the yearly inspection easier. Fitted with an automatic aluminum connector. Total length of shock absorber with 2 connectors must not not exceed 400mm.

**Used alone, it is not a PPE.**

## USE

Works on height on roofs with vertical fall hazards. All types of rope works. Adapted for the industry, the construction and telecom industry.

## MINIMUM CLEARANCE

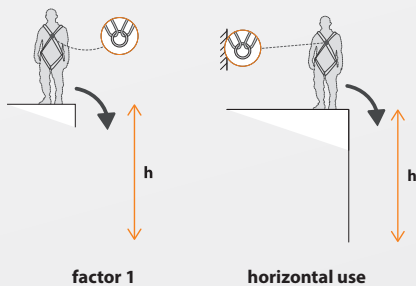

MODEL	MINIMUM CLEARANCE		
	Maxi user weight	F1	Horizontal use
ASC'O® + ABS'O®40 + NTWISTC	140 kg	≥ 2,70 m	≥ 5,80 m

