


Flexible HWB 2,8

according to EN 360:2002



IKV 11 (EN 362:2004-T)

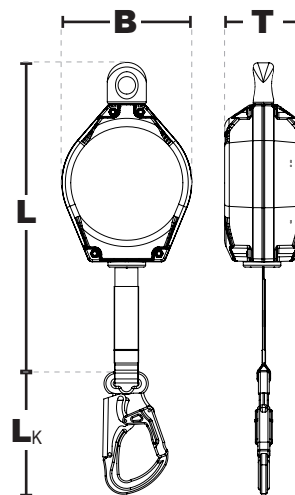

Explanations of the device names:

- H = Height Safety Device
- W = Swivel attachment point
- S = Galvanized steel lifeline
- B = Webbing lifeline
- P = Plastic housing
- Number = Insert length of the device



IKAR height safety devices have been successfully tested in a simulated fall trial over and edge
CNB 11.060 2008 (r ≥ 0,5 mm)

Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K)
					IKV 21
41-HWB 2,8	2,80 m	Aluminium	0,8 kg	240 x 84 x 61 mm	147 mm

Features:

Height safety device with internal energy absorber

- Resistant and low-maintenance height safety device eye attachment point
- Robust, seawater-resistant aluminium housing with a Dyneema® webbing lifeline sewn fall indicator
- Standard connector IKV 11
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years