EXTENSION WEBBING LANYARD



neofeu.com


REF.
NSANEX

FALL PROTECTION ONLY*

*Un seul métier, l'antichute

CERTIFICATION: EN 354:2010 / REGULATION: 2016 / 425



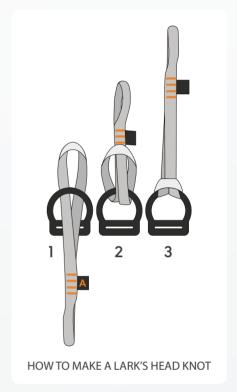

TECHNICAL SPECIFICATIONS

- Made of : dyneema/polyamide tubular webbing, 20 mm wide (R ≥ 30 kN)
- Static resistance ≥ 22 kN
- Weight: 44 g
- Single length: 0,35 m and 0,3 m with a lark's head knot

USE

To attach with a lark's head knot on the back D ring of the fullbody harnesss to make an extension strap.

DESCRIPTION

The NSANEX extension lanyard conforms to the EN 354:2010 Standard. It has been designed to extend the dorsal fall arrest attachment point of the full body harness (only on back D ring). The attachment loop remains wide open to ensure an easy connection.

